

S30 / S30A

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control A:
Pump Feed Model



Simple But Powerful

Classy design that offers quality
and simplicity

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for medium capacity outlets to add soft serve ice cream and frozen yogurt. Low profile design keeps operation simple and helps reduce cost of ownership.



Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



S30 / S30A

SOFT SERVE FREEZER

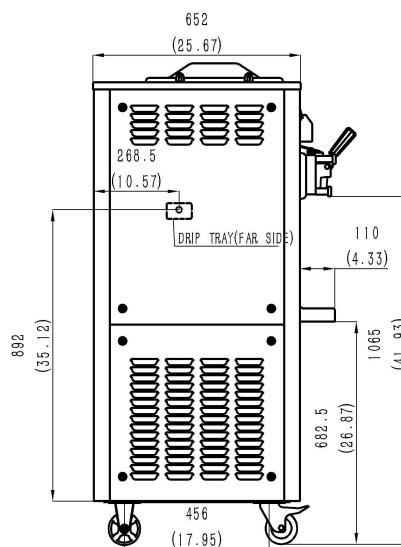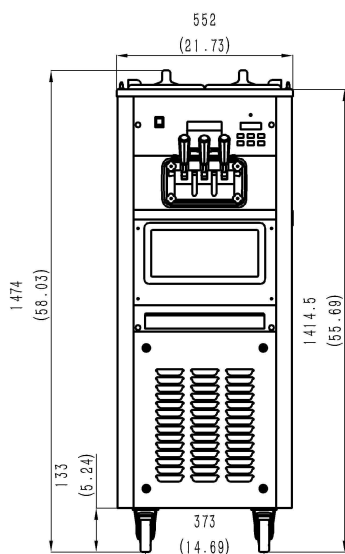

SPECIFICATIONS

| | |
|----------------------------|------------------|
| Flavors | 2 + Twist |
| Freezing Cylinders | 2 x 1.7L / 1.8qt |
| Mix Hoppers | 2 x 12L / 12.7qt |
| Output Capacity (80 grams) | 300 serves/hr |
| Clearance Requirements | 152mm/6" on back |

Weight

| | Kg/lb (Gravity) | Kg/lb (Pump) |
|----------|-----------------|--------------|
| Net | 165 / 367 | 175 / 389 |
| Shipping | 180 / 400 | 190 / 422 |

Volume 0.90 CBM / 31.78 CBF

Dimensions

| | Net (mm/in) | Shipping (mm/in) |
|--------|-------------|------------------|
| Width | 552 / 21.7 | 660 / 26.0 |
| Depth | 652 / 25.7 | 830 / 32.7 |
| Height | 1474 / 58.0 | 1640 / 64.6 |

Electrical

| | MFS | MCA | Power(kW) |
|----------------------------|-----|-----|-----------|
| 220-240/50/1 ²⁰ | | 15 | 2.6 |
| 208-230/60/120 | | 15 | 2.6 |

• 16 Amp Plug Required

• Above specifications are subject to change without notice

FEATURES

| | |
|---------------------------------|-------------------------------------|
| Control Systems | Single, Digital |
| Refrioperated Hoppers | <input checked="" type="checkbox"/> |
| Hopper Agitator | <input checked="" type="checkbox"/> |
| Temperature Display | <input checked="" type="checkbox"/> |
| Standby Mode | <input checked="" type="checkbox"/> |
| Auto Cloising Dispensing Valves | <input checked="" type="checkbox"/> |
| Dispensing Speed Control | <input checked="" type="checkbox"/> |
| Low Mix Indicator Light | <input checked="" type="checkbox"/> |
| Low Mix Indicator Alarm | <input checked="" type="checkbox"/> |
| Low Temperature Protection | <input checked="" type="checkbox"/> |
| Motor Amperage Protection | <input checked="" type="checkbox"/> |
| High Pressure Protection | <input checked="" type="checkbox"/> |
| Thermal Overload Protection | <input checked="" type="checkbox"/> |

AVAILABLE OPTIONS

| | |
|-------------------------|-------------------------------------|
| Water cooled | <input checked="" type="checkbox"/> |
| Top Air Discharge Chute | <input checked="" type="checkbox"/> |
| Spinner | <input checked="" type="checkbox"/> |
| Soft Start | <input checked="" type="checkbox"/> |
| Custom Branding | <input checked="" type="checkbox"/> |
| Light Box | <input type="checkbox"/> |
| Remote Auto Fill | <input type="checkbox"/> |