



T28C

SOFT SERVE FREEZER

1 Flavor, Countertop
Pasteurization and Air Pump Model



Most **Compact & Powerful**
medium capacity counter model
with **Auto-Pasteurization**
and intelligent control

Auto-Pasteurization

Significantly reduces frequency of cleaning to every 21 days with scheduled daily auto-pasteurization

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Operation Logging

Logs every operation and error to provide history and data for easy troubleshooting

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Ideal for any restaurants, convenience stores,
dessert stands and delis to serve ice cream and
gelato but with desire for significant reduction in
labor cost of cleaning.

Hopper Agitator

Maintain product consistency and prevent product separation

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Refresh and Revive


Restore perfect consistency automatically to reduce product waste and labor cost while ensuring food safety

Self Closing Valve with Speed Control Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



T28C

SOFT SERVE FREEZER

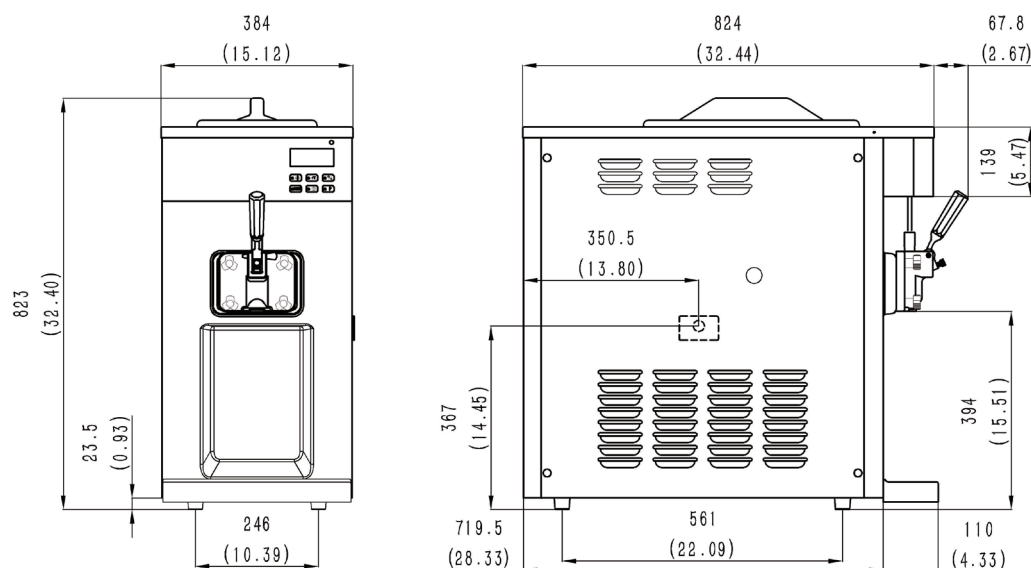

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.7L / 1.8qt
Mix Hoppers	1 x 15L (10L for A)
Output Capacity (80 grams)	300 serves/hr
Clearance Requirements	152mm/6" on back

Weight

Net 119 / 262 Kg/lb 124 / 276 Kg/lb (Pump)

Shipping 132 / 291 Kg/lb 137 / 305 Kg/lb (Pump)

Volume 0.47 CBM / 16.62 CBF

Dimensions

Width 384 / 15.1 mm/in 500 / 19.7 mm/in

Depth 720 / 28.3 mm/in 870 / 34.3 mm/in

Height 823 / 32.4 mm/in 1080 / 42.5 mm/in

Electrical

220-240/50/1 25 MFS 16 MCA 2.3 Power (kW)

208-230/60/1 30 MFS 18 MCA 2.5 Power (kW)

• 3 Phase 16Amps

FEATURES

Control System Single, Digital

Refrigerated Hopper

Hopper Agitator

Temperature Display

Standby Mode

Auto Closing Dispensing Valve

Dispensing Speed Control Low

Mix Indicator Light & Alarm Low

Temperature Protection

Motor Overload Protection

High Pressure Protection

Defrost & Refresh

Soft Start

Direct Drive Pump

Auto-Pasteurization

AVAILABLE OPTIONS

Water Cooled

Top Air Discharge Chute

Cart (Trolley)

• Above specifications are subject to change without notice